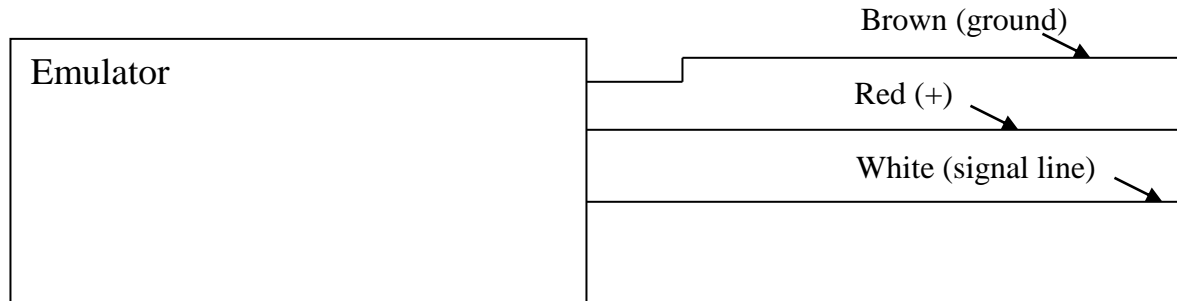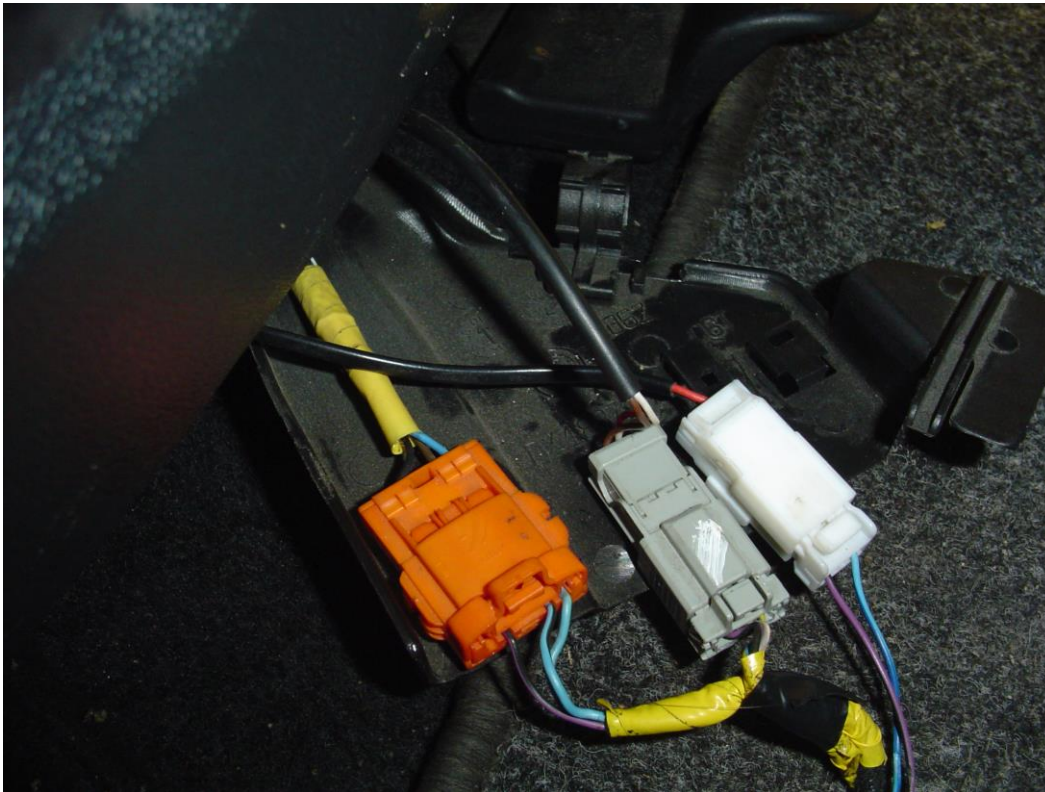**Fiat Stilo (OCS) Occupant classification sensor emulator**
INSTALLATION INSTRUCTION

Description: Occupant classification sensor emulator (further "OCS") emulates a signal of an occupied passenger seat. The SRS system will be fully functioning and airbags will deploy in case of a collision.
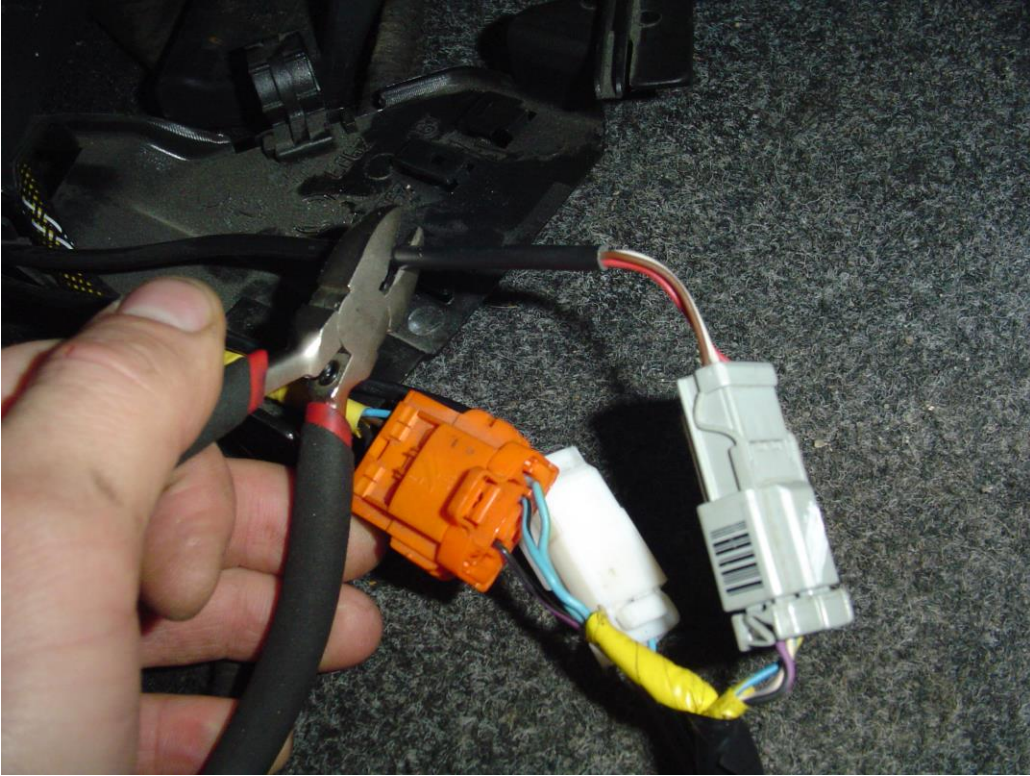
Brown (ground)

Emulator

Red (+)

White (signal line)

Installation example:
  (1) Look for the OCS connector under the passenger seat. Grey color separate connector with three wires: white – signal wire, red - battery + wire, brown - ground wire.
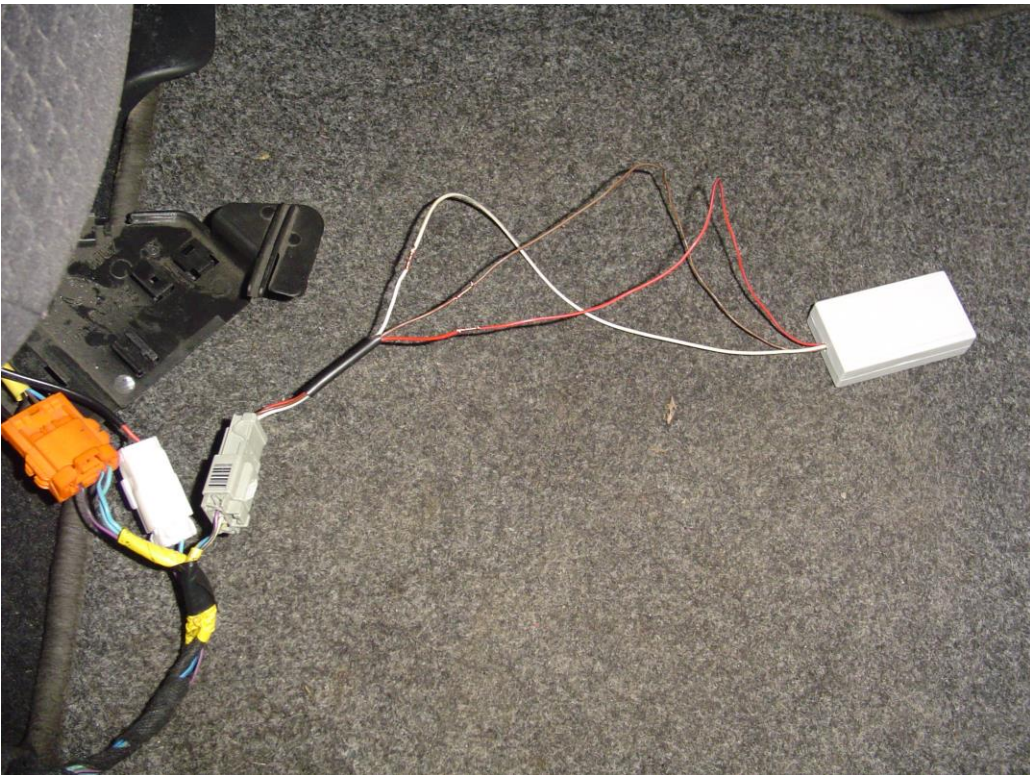

(2)
Switch off the ignition. Disconnect the OCR connector

(3)
Cut the OCS cable in a convenient place

(4)
Connect the emulator to the connector accordingly: signal to signal, ground to ground, positive to positive.

(5)
Switch the ignition back on. The SRS light comes on and after a few seconds, it goes out. If the warning light comes back on after it had gone out, keep the ignition switched on for approximately 5 min. until the SRS control unit detects the emulator. Once the emulator is detected, the SRS light should come out.

Congratulations, you are one step away from victory. Now you must carefully isolate the wires and fit the emulator in a suitable place. **Warning!** After the installation move the seat forward and backward, to look for a correct installation point for the emulator and its wires.

If you still have problems with the installation, do not hesitate and write to us via e-mail: muvida.1@gmail.com.